

QGSC(SC)/QGSU(SU)

系列标准气缸 Series Standard Cylinder




产品特点 Features

QGSC(U)系列气缸在结构要素尺寸、安装形式和尺寸方面都符合企业标准,具有工作可靠、耐久性好、互换性强的特点。安装、连接尺寸与SC、SU相同。


QGSC(U) series cylinders conform with Business standards installation dimensions. They feature reliable performance, high durability and interchangeability. All install dimension are same as SC/SU series.

图形符号 symbols

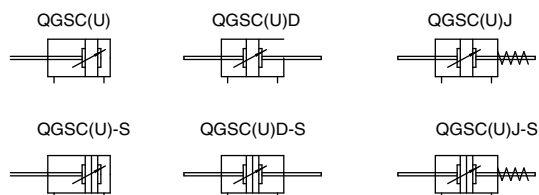

型号注释 Order Code

QGSC(U) D - 50 x 50 - 25 - k - LB Y(A/B)

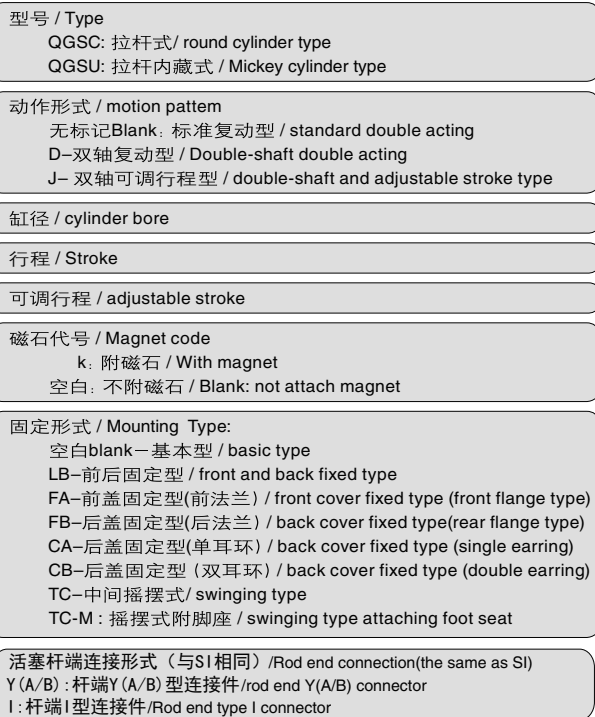

技术参数 Specification

缸内径 / Cylinder bore	32	40	50	63	80	100	125	160	200
接管口径 / Threads \varnothing	G1/8	G1/4		G3/8		G1/2			
缓冲形式 / Cushion type	可调缓冲 / Cushion								
动作形式 / Acting type	复动型 / Double Acting								
工作介质 / Working medium	过滤的压缩空气 / Filtered compressed air								
*固定形式 / Mounting type	基本型, LB型, FA型, FB型, CA型, CB型, TC型, TC-M型 Basic type, LB type, FA type, FB type, CA type, CB type, TC type, TC-M type								
使用压力范围 / Operating pressuer Range (Kgf/cm ²)	1~9.0								
保证耐压力 / Ensured pressure resistance (Kgf/cm ²)	13.5								
使用温度范围 / Operation Temperature Range (°C)	-20~70								

○接管牙型有NPT. G牙可供选择 / Threads:NPT.G are available